Cod: 8526

Energy-efficient, Class A, 2-door stainless steel refrigerated counter, -2 to +8 °C, 151×80×84h cm

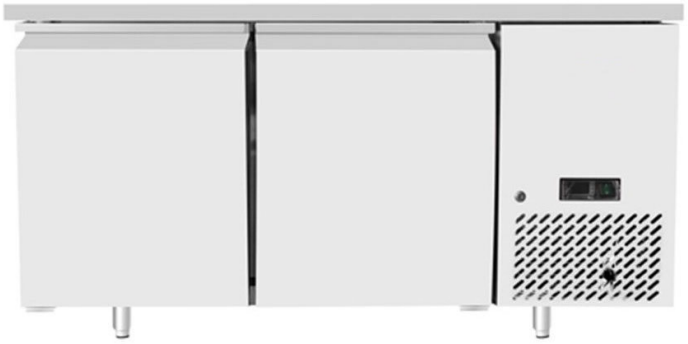

Description

Energy-efficient refrigerated display cabinet with containers compliant with catering regulations. Internal and external structure in stainless steel. ‘Embraco’ compressor rated for tropical conditions up to +43°C. ‘Dixell’ digital thermostat. ‘EBM’ forced-air cooling. Corrosion-resistant evaporator. Automatic defrost. Adjustable steel feet included as standard. Rounded internal corners for easy cleaning. Self-closing door. Magnetic seals, easy to clean and replace. Compatible with GN sizes. 7 door rails included. Castors available as accessories.

Dimensions

External dimensions	1510x800x840 mm
Grid dimensions	400x600 mm
Insulation thickness	60 mm
Internal dimensions	980x670x570 mm
Packaging dimensions	1565x855x1017 mm

Technical specifications

Capacity	250 Lt
Compressor	embraco emb46clc
Defrosting	air defrost
Electrical Power	0.25 kW
Electricity consumption	1.40 Kw/24h
Energy efficiency class	A
Frequency	50 Hz
Maximum room temperature	43 °C
Net weight	209 kg
Operating temperature	-2 +8 °C
Refrigerant gas	R600A
Refrigeration	ventilated
Thermostat	Dixell/Carel
Voltage	230 V
Weight including packaging	125 kg

Standard equipment

Included	7 guides per door leaf